


### 3. Important warnings:

- the manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.
- luminaries may be installed by qualified personnel only.
- any manipulation inside the luminaire when power supply is on causes the risk of electric shock.
- manufacturer is not responsible for any flaws caused by avoid using this manual.
- manufacturer reserves a right to change the construction of the product.
- do not assembly in places without air circulation.
- to guarantee safety of fixture functions, please assembly according to instruction.

The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law. More details of directive available at: <http://www.glos.gov>.



### Instrukcja montażu Flash

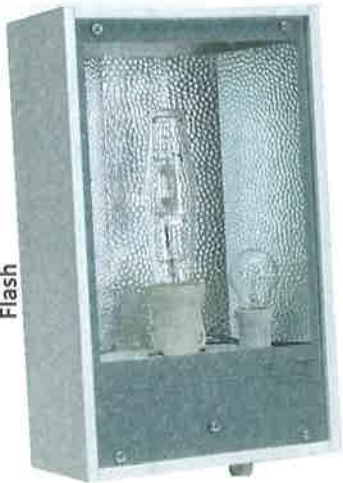


230V/50HZ HST, HIT

#### 1. Gabaryty, waga

| Moc  | Waga(kg) |
|------|----------|
| 150W | 8kg      |
| 250W | 8kg      |
| 400W | 8,5kg    |

#### 2. Montaż

- ostrożnie wyjąć oprawę z opakowania i umieścić na stabilnej powierzchni (podłoga, stół)
- odkręcić 4 wkręty, odpiąć łączuszek zabezpieczający szybę i wyjąć szybę
- podłączenie zasilania
  - przeciągnąć przewód zasilający przez dławnicę
  - podłączyć przewody wg naklejki na podstawie

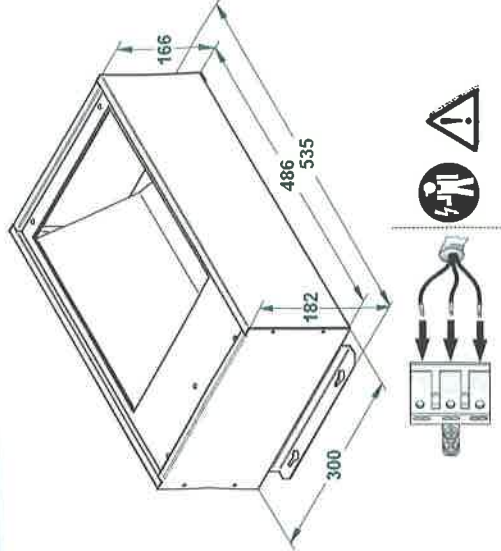

- przykręcenie oprawy do sufitu:
  - oprawa mocowana jest do sufitu na czterech wycięciach o szerokości 6,5mm
- montaż w suficie g/k:
  - wymiar otworu montażowego: 520x340
  - zamocować oprawę do konstrukcji sufitu na czterech wycięciach
  - odchylić sprężyny i nałożyć ramkę maskującą
- wkręcić źródło światła
- zapiąć łączuszek
- przykręcić szybę

